

NET xT

Esterno - SURFACE MOUNTING - ANBAULEUCHE

Profilo in alluminio ossidato per installazione esterna dotato di LED, completo di terminali di chiusura e schermo in policarbonato.

LED POWERED ALUMINIUM PROFILE FOR SURFACE MOUNTING COMPLETE WITH END CAPS AND POLYCARBONATE SCREEN.




Led-Anbauleuchte mit Endkappen und Abdeckung aus Polycarbonat.



PHOTOBIOLOGICAL CERTIFICATION CLASS 0



DATI TECNICI	TECHNICAL DATA	TECHNISCHE ANFORDERUNGEN			
Sorgente luminosa	LIGHT SOURCE	Lichtquelle	LED 14.4W/m	LED 14.4W/m	LED 14.4W/m
Certificazione fotobiologica	PHOTOBIOLOGICAL CERTIFICATION	photobiologische Zulassung	classe 0	CLASS 0	Klasse 0
Temperatura colore(K)	COLOR TEMPERATURE(K)	Lichtfarbe(K)	4200K luce naturale 3500K luce calda (a richiesta)	4200K NW 3500K WW (UPON REQUEST)	4200K NW 3500K WW (auf Anfrage)
Tensione	VOLTAGE	Voltzahl	24V (DC)	24V (DC)	24V (DC)
Alimentatore	Driver	Led-Konverter	non incluso (pag. 137-138)	NOT INCLUDED (P. 137-138)	nicht inbegriffen (siehe S. 137-138)
Lunghezza cavo	CABLE LENGTH	Kabellänge	1500 mm (cavi polarizzati completi di connettori MML)	1500 MM (POLARIZED CABLES WITH MML CONNECTORS)	1500 mm (Polarisiert Mit MML-Verbindungsstecker)
Accensione	SWITCHING SYSTEM	Schaltssystem	Senza interruttore Interruttore Sensore a lettura di movimento	WITHOUT SWITCH SWITCH MOVEMENT READING SENSOR	ohne Schalter Schalter Bewegungsmelder

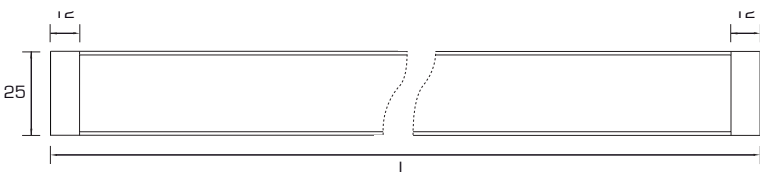


Dimensioni in millimetri (mm)

DIMENSIONS IN MILLIMETERS (MM)

Dimensionen in Millimetern (mm)

Finitura FINISH - Ausführung		Codice - PART No. - Artikel-Nr.			
		Senza interruttore - WITHOUT SWITCH - ohne Schalter			
		L = 450	L = 600	L = 900	L = 1200
		W = 5.76	W = 7.20	W = 11.52	W = 15.94
	Alluminio ossidato OXIDIZED ALUMINIUM Aluminium	168X0450N3	168X0600N3	168X0900N3	168X1200N3
Finitura FINISH - Ausführung		Codice - PART No. - Artikel-Nr.			
		Con interruttore elettronico - WITH ELECTRONIC SWITCH - Schalter			
		L = 450	L = 600	L = 900	L = 1200
		W = 5.76	W = 7.20	W = 11.52	W = 15.94
	Alluminio ossidato OXIDIZED ALUMINIUM Aluminium	168X0450N2	168X0600N2	168X0900N2	168X1200N2
Finitura FINISH - Ausführung		Codice - PART No. - Artikel-Nr.			
		Con sensore a lettura di movimento - WITH MOVEMENT READING SENSOR - Bewegungsmelder			
		L = 413	L = 563	L = 863	L = 1163
		W = 4.32	W = 5.76	W = 10.08	W = 14.40
	Alluminio ossidato OXIDIZED ALUMINIUM Aluminium	168X0413N1	168X0563N1	168X0863N1	168X1163N1



Accessori vedi pag. - ACCESSORIES SEE PAGES - Zubehör siehe Seite 129, 147